

IDEAL SOLUTION FOR PORTABLE PRINTING

MOBILE PRINTER

LK-P22

- Durability emphasized structural design
- The highest printing speed in its class (100mm/s)
- Enhanced user convenience with 5-point indicator
- Supports the latest Bluetooth 4.2 technology
- Large roll capacity(Ø 40mm)
- Long battery life (1510mA)
- The size is smaller than cellphones
- Easy Bluetooth connection setting by using NFC function!




Made for
 iPhone iPad



NFC

No more complicated Bluetooth connection setting!
 Easy Bluetooth connection setting by using NFC function!
 Equipped NFC capability for easier printer setting

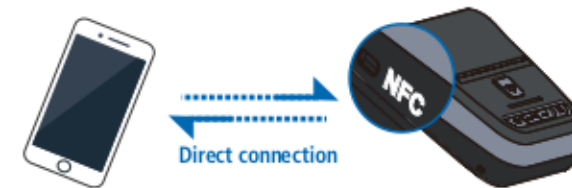

CRADLE

4 CRADLES IN 1 SET



1 power supply can be charged up to 4 cradles in a set

SPECIFICATION

ITEM	TYPE	
MODEL	LK-P22	
PRINTING	METHOD	Direct Thermal
	SPEED	100mm / sec
DOT DENSITY	203 DPI	
DOT PITCH	8dots /mm, 0.125 pitch	
EFFECTIVE PRINTING WIDTH	48mm, 384dots/line	
CHARACTER PER LINE	Font A(12 x 24) 32 columns Font B(9 x 17) 42 columns	
PAPER	TYPE	Thermal Paper
	WIDTH	Max. 58mm
	THICKNESS	0.06mm
	ROLL DIAMETER	Max. ø 40mm
RELIABILITY	ROLL CORE INNER	12.5mm ± 0.5mm
	TPH LIFE	50km
CHARACTER SET	PULSE ACTIVATION	50,000,000 pulse or more(12.5% Print Ratio)
	ALPHA NUMERIC CHARACTER	95
	EXTENDED GRAPHIC INTERNATIONAL CHARACTER	128 x 18page(1 space page) 14
BARCODE	1D	EAN-8,EAN8(+2+5), EAN-13, EAN13(+2+5), Codabar, Code 11, Code 39, Code 93, Code 128, ITF, LUPC-A(+2+5), UPC-E,UPC-E(+2+5), Planet, UPC-A etc.
	2D	QR, PDF417, MicroPDF417, Maxicode, Datamatrix, Aztec, RSS14, TLC39
FONTS	FontA(12x24), FontB(9x17), Asian Font(KOR,JPN, CHN_GB2312,CHN_BIG5), Font0/1/2/4/5/6/7, Resident TTF, Downloadable TTF, FontA-H, FontGS, Resident TTF(Font0), Font1 - 8	
EMULATION	ESC/POS, CPCL, ZPL	
DRIVER	Window Printer Driver(10, 2012, 8.0/8.1, 7, 2008, Vista, 2003, XP, 32 & 64bit), Windows (CE 4.2 & 5.0 & 6.0 & 7.0 / Mobile 5.0 & 6.0)	
SENSOR	Paper end, Cover open, Black mark	
INTERFACE	STANDARD	USB
	OPTION	Bluetooth Smart Ready Ver 4.2 or Wi-Fi (802.11a/b/g/n)
BATTERY CHARGER	AC/DC Charger	
BATTERY	7.4V 1510mAh Li-ion, 2 Hrs Charging time, 55Hrs Stand-by	
DIMENSION	80mm x 119.4mm x 44mm (W x D x H)	
WEIGHT	242.5g (With Battery)	
TEMPERATURE	OPERATION	-10 ~ 50°C
	STORAGE	-20 ~ 60°C
HUMIDITY	OPERATION	35 ~ 80%
	STORAGE	10 ~ 90%

•All specification and desings are subject to change without notice.

